

Renton 650

Compatible with your lifestyle

PN: PWUP-LI065RE-CG01B

EAN: 6422956007652

Specifications

Capacity	650 VA / 360 W
Type	Line Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	170-280 VAC
Frequency Range	60/50 Hz (auto sensing)
Output	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz
Transfer Time	Typical 4 ms
Waveform (Batt. Mode)	Simulated Sine Wave
Indicators type	
AC Mode	Green lighting
Battery Mode	Green flashing every 10 seconds
Low Battery	Green flashing every second and red lighting
UPS Fault	Red lighting
Over-temperature	Red flashing every 0.5 second
Alarm	
Battery Mode	Sounding every 10 seconds
Low Battery	Sounding every second
Overload	Sounding every 0.5 seconds
Fault	Continuously sounding
Protection	
Outlets type	3x Schuko Battery Backup
Full protection	Overload, Discharge & Overcharge protection
Humidity	0-90 % RH @ 0-40°C (non-condensing)
Noise level	Less than 40dB



3 Schuko
Outlets with
Protection



Auto-Restart



Automatic Voltage
Regulation

- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Compact size with local receptacles for easy use
- Simple and easy installation & operation

Battery


Battery Type & Number	1x GP05122F PN: BTVACEUOATF2FCN01B
Battery Voltage	12V
Typical Recharge Time	6-8 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 18 min 50% Load - 6 min 75% Load - < 2 min 100% Load - < 1 min

Physical

Product dimensions	240 x 158 x 91.5 mm
Product weight	3.83 kg



Running time on battery

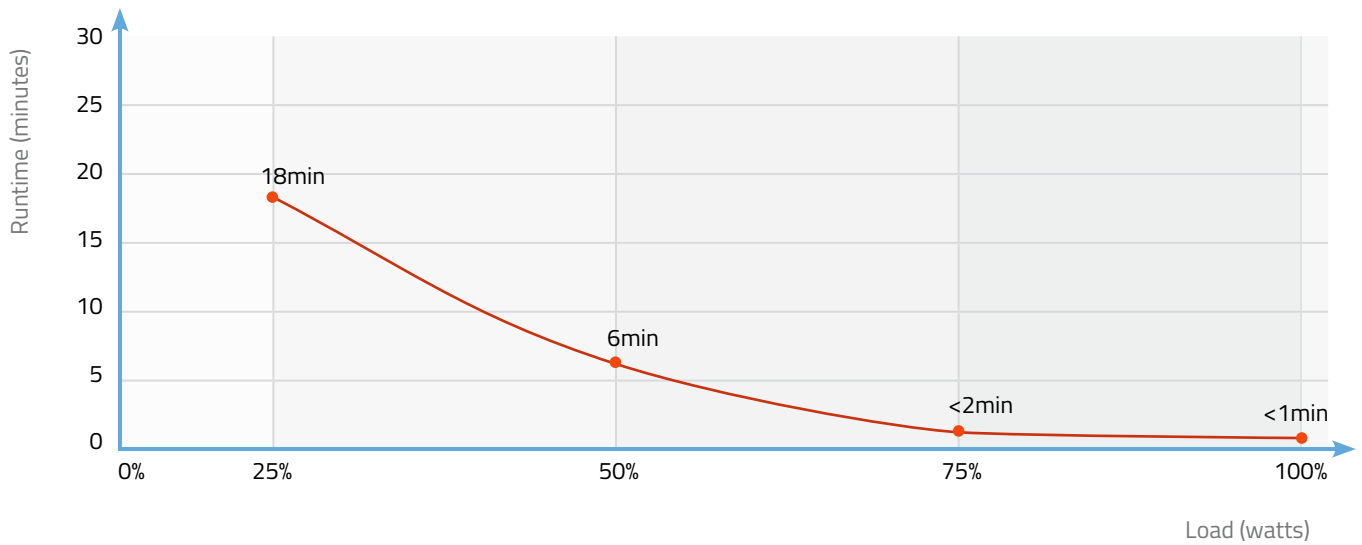

Logistics

Carton Box Size (LxHxW)	441 x 241 x 290 mm
Pieces in the Carton Box	3 pcs / ctn
Net & Gross weight / CTN	N.W. / G.W.: 11.49 kg / 12.9 kg



Certificates

RoHS 2011/65/EU CE

