

Keen 800

The power to control

PN: UPLI-LI080KE-CG01B
EAN: 6422956009502

Specifications

Capacity	800 VA / 480 W
Type	Line-Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	162 ~ 290 VAC
Frequency Range	50Hz / 60Hz (Auto Sensing)
Output	
Nominal Voltage	230 VAC
Accepted Voltage Range	207~253 VAC
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 1%
Power Factor	0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	Typical 4 ms
Overload Protection	Circuit breaker
Line mode overload	>(110%±10)% fault after alarm 1min >(120%±10)% fault immediately
Battery mode overload	>(110%±10)% fault after alarm 1min >(120%±10)% fault immediately
Indicators type	
LED & Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators
Protection	
Outlets type	2 x Schuko Battery Backup & Surge Protection
Full protection	Overload, Short Circuit, Over discharge and Over charge
Environment	
Noise level	Less than 40dB
Humidity	0-90 % (non-condensing)
Temperature	0-40°C



2 x Schuko outlets with protection



Auto-Restart



Simulated sinewave

- Simulated sinewave
- Auto-Restart while AC is recovering
- Auto-Charge
- Automatic Voltage Regulation (AVR)
- Off-Mode Charging
- Cold start function

Battery

Battery Type & Number 1 x GP09122L
(PN: BTVACGUEBTI2LCG01B)

Typical Recharge Time 8 hours up to 90% capacity

Running time on battery (minutes)
25% Load - 18 min
50% Load - 3 min
75% Load - 1 min
100% Load - <1 min

Physical

Product dimensions 276 x 87 x 165 mm


Product weight 4.4 kg

Retail pack dimensions 319 x 126 x 232 mm

Retail pack Weight 4.6 kg



Running time on battery

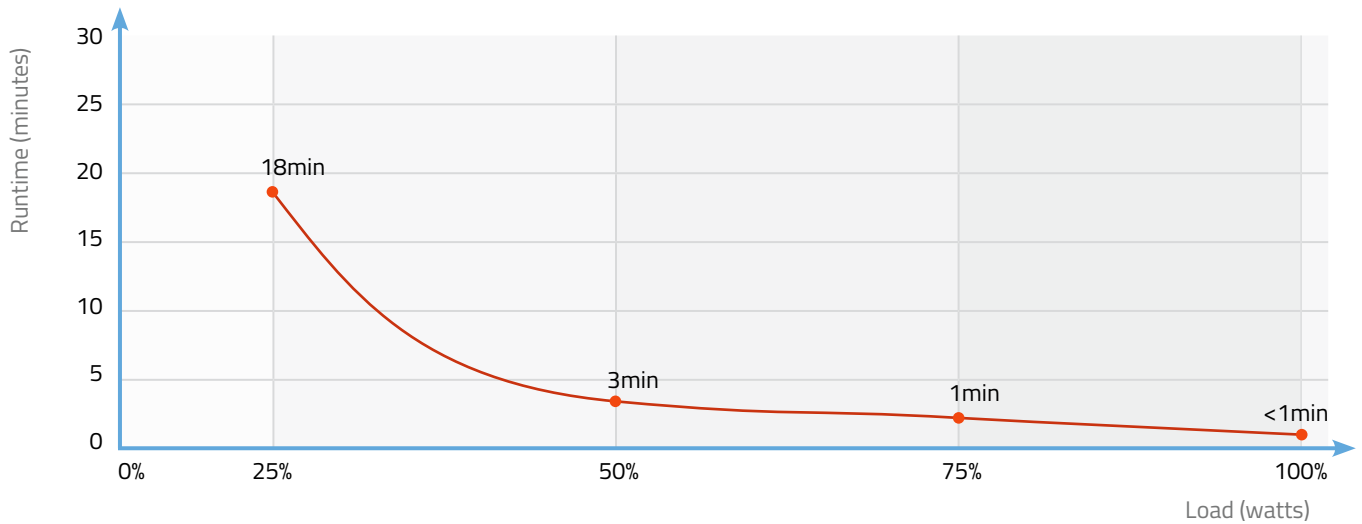

Logistics

Carton Box Size (LxWxH) 524 x 245 x 330 mm
Pieces in the Carton Box 4
Net & Gross weight / CTN NW: 18.4 kg / GW: 19.1 kg



Certificates

RoHS 2011/65/EU CE

